


Intensifier Series Dome Cameras w/ Chameleon Covers

HT-7246IHR (2.8-11mm lens)

HT-7247IHR (9-22mm lens)

Intensifier Series	See in the dark without IR LEDs
Chameleon Cover	A snap on cover that converts the housing from the standard dark grey to decorator white. It can be painted to match any décor without painting the actual camera housing
540 Lines of Color Resolution	Extreme resolution for extreme detail
2.8 to 11mm Auto Iris Varifocal Lens	A wider zoom range to fit more applications
Wall & Ceiling Mount	Features an internal 3-axis mount for maximum versatility
Weatherproof / Tamperproof	Indoors or outdoors, meets all of your surveillance needs
Dual Voltage Operation	12 Volts DC or 24 Volts AC with line-lock Voltage is auto-sensing

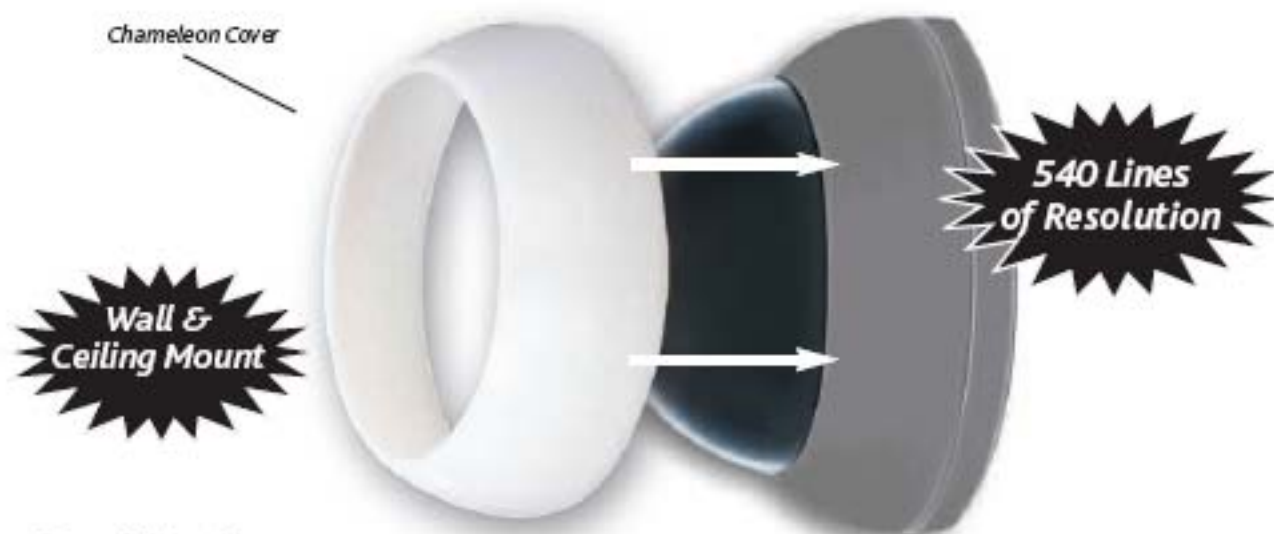

Specifications

Horizontal Resolution	540TV lines
Intensifier	Built-in (selectable from 2x to 128x)
Image Device	SONY HQ-1* with a customized DSP behind it
Min. Object Illumination	0.002 lux (intensifier) 0.03 lux (shutter)
Effective Picture Element	410K
Speco Light Compensation (SLC/WDR)	OFF, LOW, MIDDLE, HIGH
White Balance	W-ATW / S-ATW / AWC / MANUAL
Electronic Shutter	1/60-1/100,000 seconds
AGC	AGC-L, AGC-M, AGC-H, OFF selectable
Built In Lens	DC auto iris varifocal lens 2.8-11mm, 1:1.3-2.0
Video S/N Ratio	Greater than 50db
Weatherproof Standard	IP66
Mechanical construction	Aluminum composite/polycarbonate - tamper resistant
Operating Environment	-20°F to 120°F
Video Signal Output	1.0V (p-p) NTSC composite, 75 ohms / BNC Connector + Video Test Connector
Power Consumption	230mA (DC) / 3.8W (AC)
Power Supply	12V DC & 24V AC (Dual Voltage)
Weight	24 ounces
Scanning System	2:1 interlaced 525 lines / 60 fields / 30 frames
Synchronization	Internal / line lock selectable through OSD
Video Noise Reduction	ON / LOW / MIDDLE / HIGH
Motion Detection	MD1 / MD2 / OFF
On Screen Display (OSD)	Built-in
Privacy function	ON / OFF (4 Programmable Zone)
Dimensions	6.29"W x 3.89" H