




# SVR-24PRT/SVR-960(P)RT

## Real Time Recorder

### Features

- Alarm recording function : 2Hrs of recording time mode (SVR-24PRT)L6H, L18H, L30H modes (SVR-960(P)RT)
- Built-In time/date generator
- Diamond like carbon head, 4-head
- Super clear picture
- Field/Frame recording function
- Timer recording (with 15 programs for a week (SVR-24PRT))(with 10 programs for a week (SVR-960(P)RT))
- Repeat recording and series recording function
- Power loss memory function  
: checks the recording performance (SVR-24PRT)
- Record check function  
: saves the last four hours from power failure to recovery (SVR-24PRT)  
: checks the recorder to make sure the recording is normally progressing
- Back-Up time : approx. 1year

Dimensions (unit : mm)

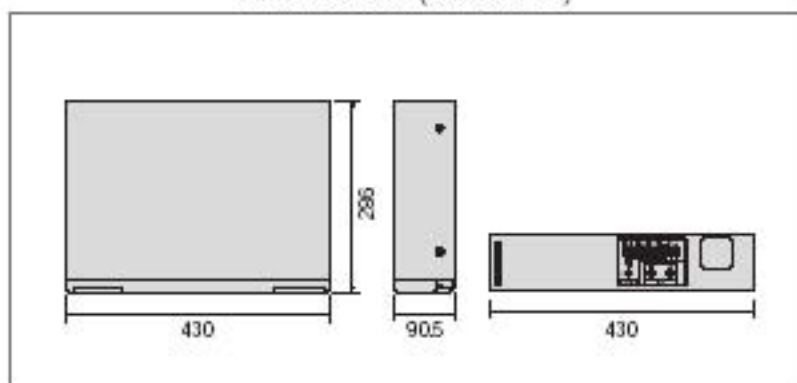

Front/Rear Panel



### Specifications

	SVR-24PRT	SVR-960(P)RT
Video	Recording Method Rotary Head Helical Scanning System	Rotary Head Helical Scanning System
	Input/Output Rear BNC Jack(10Vp-p Unbalanced, 75 ohms)	Rear BNC Jack(10Vp-p Unbalanced, 75 ohms)
	Head 26 μm DA Head(EP Head) Diamond Like Carbon	26 μm DA Head(EP Head) Diamond Like Carbon
Audio	Recording Mode L6, L18, L30 Modes(E-180)	L6, L18, L30 Modes(E-180: PAL / T-120: NTSC)
	Input (RCA Jack) -8dBm	-8dBm, 600
	Output (RCA Jack) -8dBm	-8dBm
Tape Speed	1/2mm/sec (L6H Mode)	1/2mm/sec (L6H Mode)
Recording System	REC/PB Speed Mode : : L6, L18, L30H; 000H (E-180)	REC/PB Speed Mode : L6, L18, L30H, T2(20)168(24)480(960)H; 000H (E-180: PAL, T-120: NTSC)
High Speed Rewind	Series REC, Repeat REC, 1-Shot REC Less than 100sec(E-180)	Series REC, Repeat REC, 1-shot Less than 100sec(E-180 : PAL / T-120 : NTSC)
Control	JOG/Shuttle Control	JOG/Shuttle Control
OSD	Clock Display Date Display 3-Code	Clock Display Date Display 3-Code
Timer	Back-Up Time : 1 year REC Lock FLT/LED-Digit : FLT	Back-Up Time : 1 Year, REC Lock FLT/LED-Digit : FLT
Remain	HSR/FF/REW Time ≤ 100sec)	HSR/FF/REW Time ≤ 100sec)
ATR	Auto ATR	Auto ATR
System	Basic Speed : LP Slow/Still/Reverse Play/Search Z-Search(SR/SLP) : x5/x7, x9/x15 Field/Advance-Field Slow Loading Type : Full Loading	Basic Speed : NTSC(SLP)PAL(LP) Slow/Still/Reverse Play/Search Z-Search(SP/SLP)NTSC(LP)PAL(L) : x5/x7 x9/x15 Field/Advance-Field Slow Loading Type : Full Loading
Alarm	Alarm REC/Recall/Search/LED Display : High REC	Alarm REC/Recall/Search/LED Display : High REC(SVR-960NRT) REC-Lock
Clock Display	Reset Button, Display Position : 4-Position, Usage Time, Count memory	Reset Button, Display Position : 4-Position, Usage Time, Count memory
Environmental Conditions	Operating Temperature : 5~40°C Operating Humidity : Less than 80%	Operating Temperature : 5~40°C Operating Humidity : Less than 80%
Power Requirements	AC100~240V, 50Hz	AC100~240V, 50Hz (PAL) AC120, 60Hz (NTSC, except for Latin America)
Power Consumption	16W	16W
Weight (kg)	Approx. 4.3Kg	Approx. 4.3Kg
Dimension(WxHxD)mm	430 x 90.5 x 286 mm	430 x 90.5 x 286 mm
Packing	500 x 386 x 198 mm	500 x 386 x 198 mm